


## 5 BIT – D/A CONVERTER AND POSITION AMPLIFIER

- 5 BIT D/A CONVERTER (1/2 LSB MAX LINEARITY ERROR) ;
- ERROR AMPLIFIER ;
- POSITION AMPLIFIER.

### DESCRIPTION

The L291, a monolithic LSI circuit in a 16-lead dual in-line plastic package, is intended for use with the L290 and L292 to form a complete 3 chip DC motor positioning system for applications such as carriage/daisy-wheel position control in typewriters.


The L290/291/292 system can be directly controlled by a microprocessor.

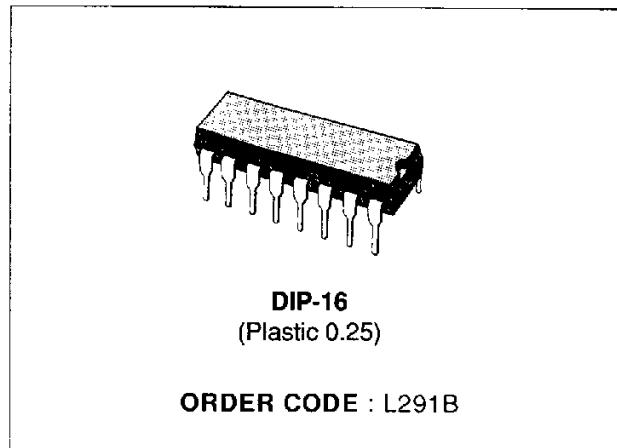


### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_s$	Supply Voltage	$\pm 15$	V
$P_{tot}$	Total Power Dissipation $T_{amb} = 70^\circ\text{C}$	1	W
$T_{stg}, T_j$	Storage and Junction Temperature	-40 to 150	°C


### SYSTEM BLOCK DIAGRAM

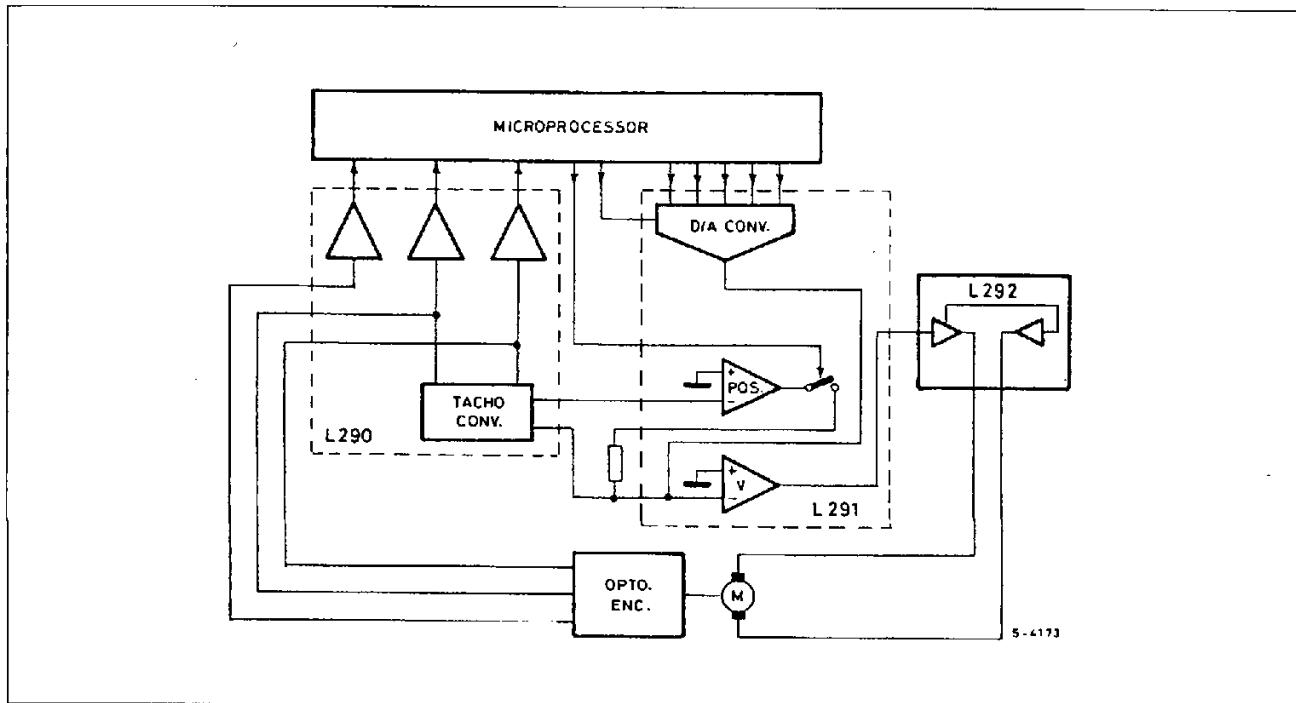


## CONNECTION DIAGRAM (top view)

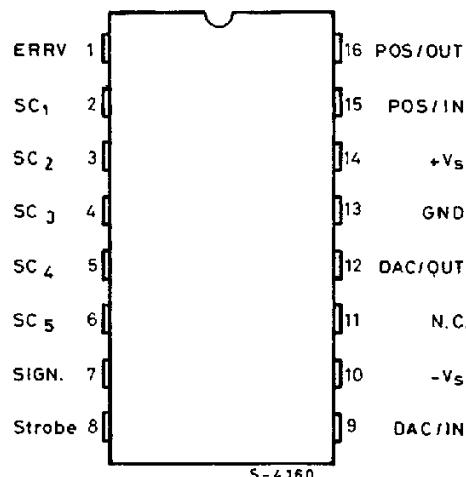

## BLOCK DIAGRAM

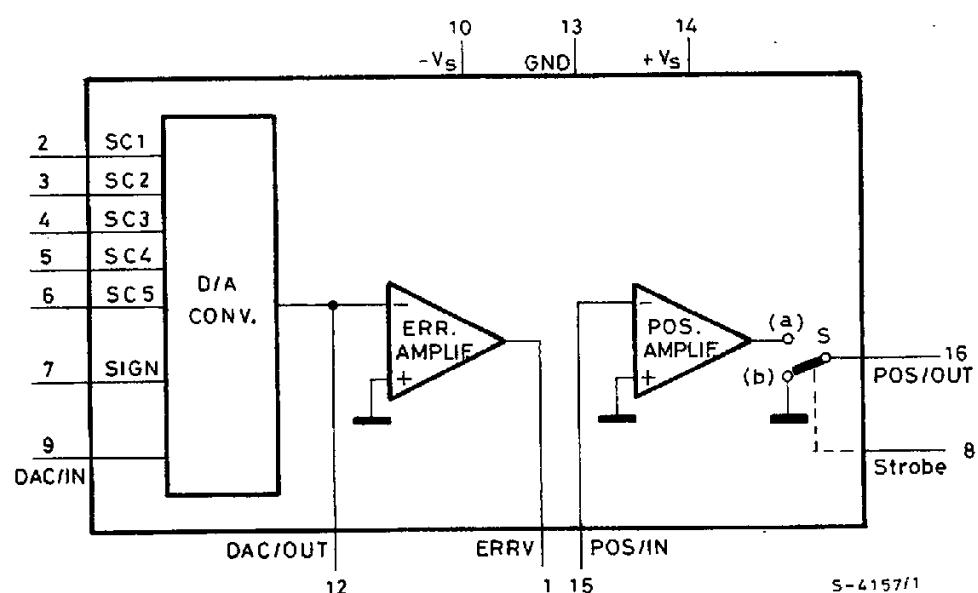

## TEST CIRCUIT

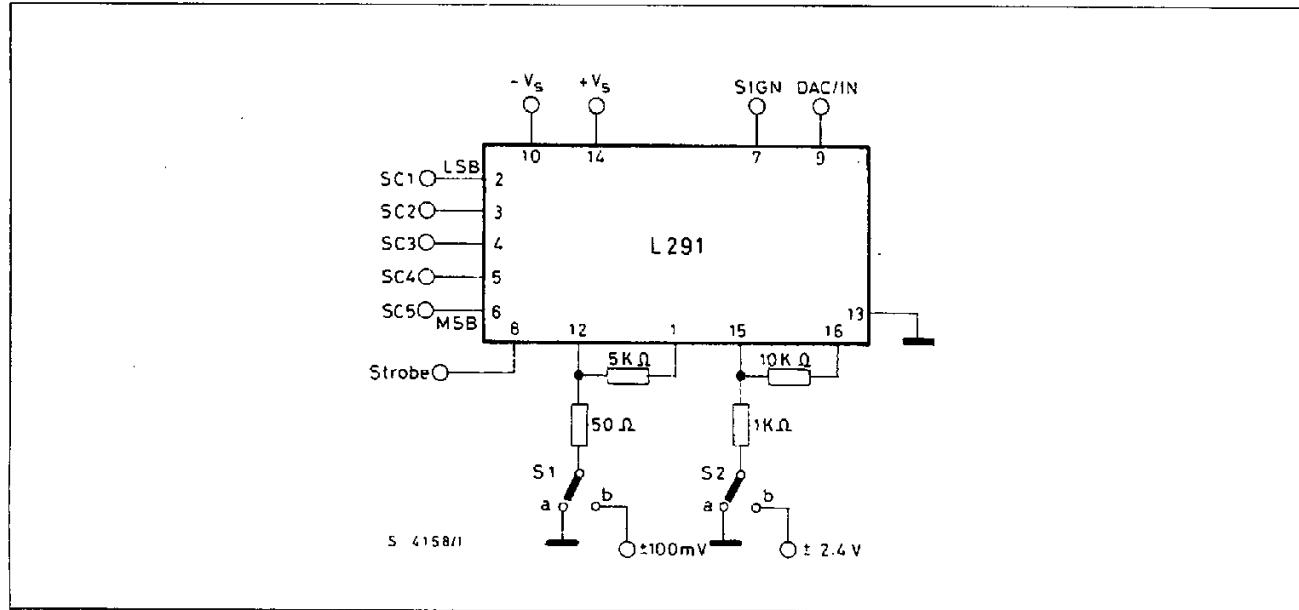

## THERMAL DATA

$R_{th\text{ j-amb}}$	Thermal Resistance Junction-ambient	Max	80	$^{\circ}\text{C/W}$
-----------------------	-------------------------------------	-----	----	----------------------

**ELECTRICAL CHARACTERISTICS** (refer to the circuit, S1 and S2 in (a),  $V_s = \pm 12$  V,  $T_{\text{amb}} = 25^{\circ}\text{C}$ , unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_s$	Supply Voltage		$\pm 10$		$\pm 15$	V
$I_d$	Quiescent Drain Current			6.5	10	mA

## POSITION AMPLIFIER

$V_{\text{strobe}}$	Enable Voltage Level	$V_L(S \text{ in (a)})^*$	0		0.8	V
		$V_H(S \text{ in (b)})^*$	2.4		$+V_s$	V
$V_{os}$	Output Offset Voltage (pin 16)	$V_{\text{strobe}} = V_L ; G_v = 20 \text{ dB}$			$\pm 50$	mV
$I_b$	Input Bias Current (pin 15)	$V_{\text{strobe}} = V_L$			0.3	$\mu\text{A}$
$V_o$	Output Voltage Swing (pin 16)	$V_{\text{strobe}} = V_L ; S2 \text{ in (b)} ; V_s = \pm 10.8 \text{ V}$	$\pm 9$			V
$V_R$	Residual Output Voltage (pin 16)	$V_{\text{strobe}} = V_H$			$\pm 20$	mV

\* See block diagram and the note for Position Amplifier.

## ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
<b>D/A CONVERTER</b>						
$I_{ref}$	Current Reference Input Range (pin 9)		0.3		1.2	mA
$V_{os}$	Current Reference Offset Voltage (pin 9)	$I_{ref} = 0.3 \text{ to } 1.2 \text{ mA}$ All Inputs High			$\pm 20$	mV
$I_o$	Output Current Range (pin 12)				1.4	mA
$I_o$	Output Current (pin 12)	$I_{ref} = 0.722 \text{ mA}$ SC1 to SC5 = L	SIGN = L( $I_{o1}$ )	-1.358	-1.4	-1.442
			SIGN = H( $I_{o2}$ )	+1.358	+1.4	+1.442
$\Delta I_o$	Linearity Error	$I_{o1} + I_{o2}$ $I_{ref} = 0.722 \text{ mA}$	-21		+21	$\mu\text{A}$
					1.61	%FS
$I_{os}$	Pin 12 Output Offset Current (including Error Amplifier bias current)	All Inputs High			$\pm 0.4$	$\mu\text{A}$
$V_L$	Low Voltage Level (digital inputs)	SC1 = LSB SC5 = MSB	0		0.8	V
$V_H$	High Voltage Level (digital inputs)		2.4		$+ V_s$	V
$I_L$	Digital Inputs Current (low state)		$V_L = 0.4V$		-50	$\mu\text{A}$
$I_H$	Digital Inputs Current (high state)		$V_H = + V_s$		1	$\mu\text{A}$

## ERROR AMPLIFIER

$V_{os}$	Output Offset Voltage (pin 1)	$I_{ref} = 0.5 \text{ mA}$ ; All Inputs High $G_v = 40 \text{ dB}$			$\pm 200$	mV
$I_o$	Output Current (pin 1)				$\pm 5$	mA
$V_o$	Output Voltage Swing (pin 1)	All Inputs High S1 in (b) ; $R_L = 10 \text{ k}\Omega$	$\pm 7.4$		$\pm 8.4$	Vp

## D/A CONVERTER

The L291 contains a 5-bit D/A converter accepting a binary code and generating a bipolar output current, the polarity of which depends on the SIGN input. The amplitude of the output current is a multiple of a reference current  $I_{ref}$ .

The maximum output current is

$$I_{FS} = \pm \frac{31}{16} I_{ref}$$

The following table shows the value of  $I_o$  for different input codes. Note that the input bits are active low.

DIGITAL INPUT WORD						Output Current $I_o$
SIGN	SC5 MSB	SC4	SC3	SC2	SC1 LSB	
L	L	L	L	L	L	$-\frac{31}{16} I_{ref}$
L	H	H	H	H	L	$-\frac{1}{16} I_{ref}$
X	H	H	H	H	H	0
H	H	H	H	H	L	$+\frac{1}{16} I_{ref}$
H	L	L	L	L	L	$+\frac{31}{16} I_{ref}$

X = indifferent

L = low

H = high

This D/A converter has a maximum linearity error equal to  $\pm 1/2$  LSB (or  $\pm 1.61\%$  Full Scale) ; that guarantees its monotonicity.

## ERROR AMPLIFIER

In order to have a good stability, the Error Amplifier must work with a closed loop gain greater or equal than 20 dB.

## POSITION AMPLIFIER

It is inserted by means of the strobe signal, TTL and microprocessor compatible. Its output is connected to pin 16 when  $V_{strobe} = \text{Low}$  ; pin 16 is grounded for  $V_{strobe} = \text{High}$ .

## SYSTEM DESCRIPTION : refer to the L292 data sheet.

Figure 1 : Complete Application Circuit.

