

HEADSET MICROPHONE


XS 1450 has an ergonomic design and a robust fixation system. It is suitable for live shows as it goes unnoticed and provides total freedom of movement on stage.




Technical Specifications

Type	Electret Condenser
Cartridge Diameter	∅ 4 mm
Polar Pattern	Omnidirectional
Sensitivity	22mv/Pa(-32dB±3dB)
Frequency Response	80 Hz – 20 kHz
Impedance	2.2KΩ±30%
Power Supply	2.0V – 10V DC
S/N Ratio	≥88dB
Cable length	1.2 m
Connector type	3.5 mm male screw

Frequency Response

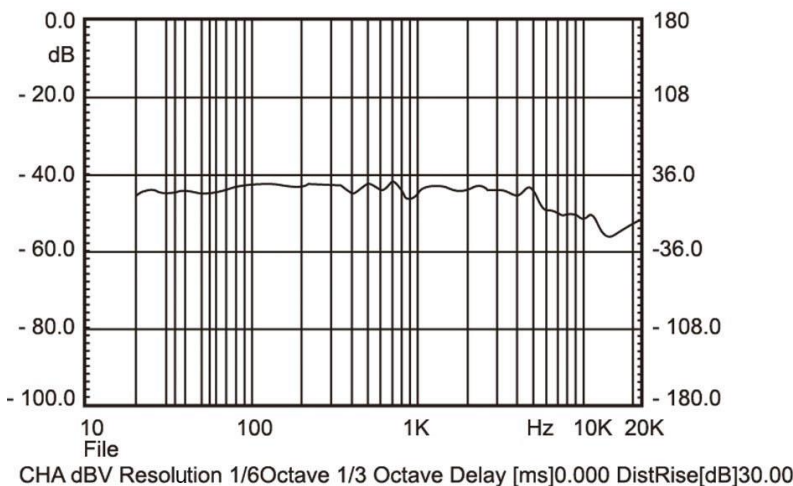

Polar Pattern

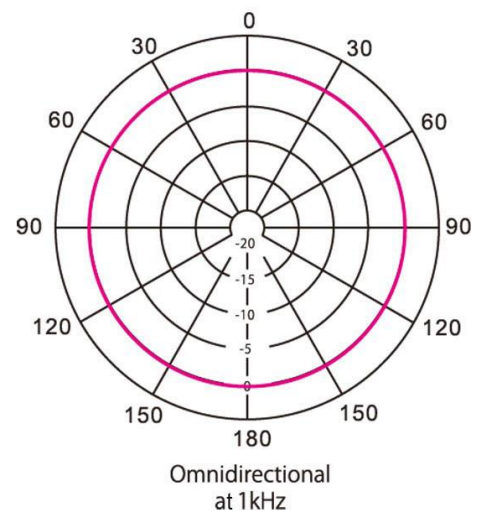

MICRÓFONO DE CABEZA


XS 1450 tiene un diseño ergonómico y un firme sistema de fijación. Es adecuado para espectáculos en vivo ya que pasa desapercibido y ofrece total libertad de movimiento en el escenario.



Especificaciones Técnicas

Tipo	Condensador electret
Diámetro de la cápsula	∅ 4 mm
Patrón Polar	Omnidireccional
Sensibilidad	22mv/Pa(-32dB±3dB)
Respuesta en frecuencia	80 Hz – 20 kHz
Impedancia	2.2KΩ±30%
Alimentación	2.0V – 10V DC
Relación S/N	≥88dB
Longitud del cable	1.2 m
Tipo de conector	Rosca macho de 3.5 mm

Frequency Response

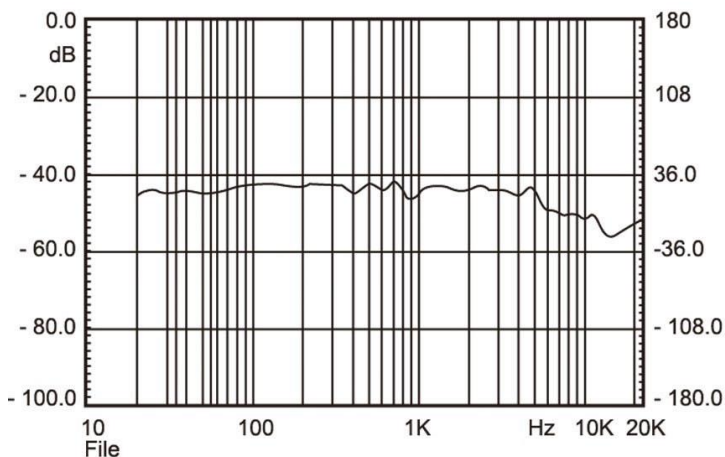

CHA dBV Resolution 1/6Octave 1/3 Octave Delay [ms]0.000 DistRise[dB]30.00

Polar Pattern

