


## Manguera Altavoz 2x1,50 mm<sup>2</sup>



### Specification

Cross-Section

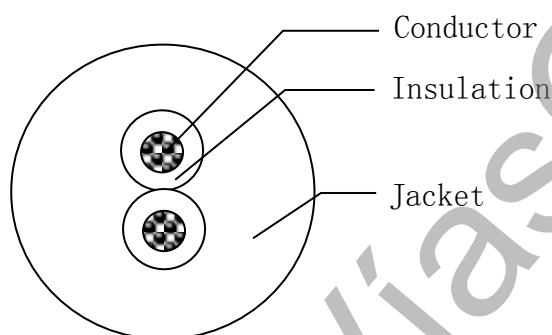

Style description

EMELEC VIASCOM 2X1.5MM<sup>2</sup>  
Rated temperature: 70°C, rated voltage: 49 volts.

#### Wire & Cable Construction

Conductor	Bare Copper (OFC)
Construction(No/mm)	OFC12/7/0.15 (84/0.15)
Cond.style(mm)	0.15 (±0.006)
Insu.Material	SOFT PVC
Nom.thickness(mm)	0,52
Min.thickness(mm)	0,42
Insulation.Dia(mm)	2.9±0.1
Insulation.Color	Red (Ral 3020), Black (Ral 9005)
Jacket material	SOFT PVC
Jacket Nom thickness	0,9
Jacket Min thickness	0,67
Jacket O.D(MM)	7.8±0.2
Jacket Color	Black (Ral 9005) or White (Ral 9010)

#### Electrical Properties

Item	Electrical Characteristics
Rated Temperature	70°C
Rated voltage	49V
Mav. voltage	300V
Max.Cond.Resistance	16.0Ω/kM & 20°C
Reference Standard	/
Dielectric strength	AC.2000V, 1min NO Break

#### Physical Properties

Test Object Item	Insulation	Jacket
Tensile strength	≥ 10.3Mpa	≥ 10.3Mpa
Elongation	≥ 100%	≥ 100%
Aging Condition (°C)	80±2°C/168h	
Tensile strength	≥70% of original	≥70% of original
Elongation	≥65% of original	≥65% of original
Flame Test	FT1	

#### Marking

Q15-215N 2x1.50mm<sup>2</sup> OFC LOUDSPEAKER CABLE by EMELEC VíasCom®

Color Printing: White (Ral 9010)

Packing | 100M/ROOL and 500M/ROOL

Q15-215N 100m/Paper Spool (280x75x180mm) or 500m/wooden spool

COPIA NO CONTROLADA