


Manguera Altavoz 4x2,50 mm²



Specification

Cross-Section

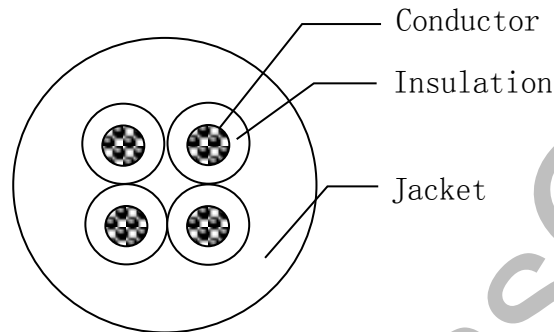

Style description

EMELEC VIASCOM 4X2.5MM²
Rated temperature: 70°C, rated voltage: 49 volts.

Wire & Cable Construction

Conductor	Bare Copper (OFC)
Construction(No/mm)	OFC20/7/0.15 (140/0.15)
Cond.style(mm)	0.15 (±0.006)
Insu.Material	SOFT PVC
Nom.thickness(mm)	0,52
Min.thickness(mm)	0,42
Insulation.Dia(mm)	3.5±0.1
Insulation.Color	Red (Ral 3020), Black (Ral 9005), White (Ral 9010), Yellow (Ral 1018)
Jacket material	SOFT PVC
Jacket Nom thickness	1,0
Jacket Min thickness	0,9
Jacket O.D(MM)	10.5±0.2
Jacket Color	Black (Ral 9005)

Electrical Properties

Item	Electrical Characteristics	
Rated Temperature	70°C	
Rated voltage	49V	
Mav. voltage	300V	
Max.Cond.Resistance	7.98Ω/kM & 20°C	
Reference Standard	/	
Dielectric strength	AC.2000V, 1min NO Break	
Physical Properties		
Test Object Item	Insulation	Jacket
Tensile strength	≥ 10.3Mpa	≥ 10.3Mpa
Elongation	≥ 100%	≥ 100%
Aging Condition (°C)	80±2°C/168h	
Tensile strength	≥70% of original	≥70% of original
Elongation	≥65% of original	≥65% of original
Flame Test	FT1	

Marking

Q15-425N 4x2.50mm² OFC LOUDSPEAKER CABLE by EMELEC VíasCom®

Color Printing: White (Ral 9010)

Packing | 100M/ROOL

Q15-425N 100m/Paper Spool (280x75x180mm)

COPIA NO CONTROLADA